


AFX-516N



Features

- Full HD Display
- 16Ch. Recording (max. 15fps/ch)
- Support AHD, TVI, CVI, 960H, IP
- 16Channel BNC Input
- Support POS
- 2HDD
- Network Function - DDNS, DHCP, UPNP
- Smartphone Viewer Support (Android/iPhone/iPad)

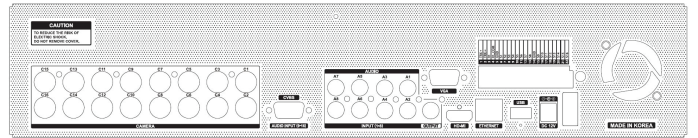

Specifications

AFX-516N	
VIDEO	
Input	16 BNC
Input Resolution	5MP, 4MP, 3MP (*Half Resolution) / 2MP, 960H
Output	1 HDMI, 1VGA, 1 D-SUB
Output Resolution	UHD, QHD, FHD, SXGA, XGA
RECORDING	
Speed	15fps/ch(4MP), 30fps/ch(2MP) 5MP, 4MP, 3MP: 15fps/ch (*Half Resolution)
Compression	H.265, H.264
Resolution	5MP, 4MP, 3MP (*Half Resolution) / 2MP, 960H
PLAYBACK	
Speed	2MP : 208 fps *Half 3MP: 146 fps *Half 4MP: 234 fps *Half 5MP: 173 fps
Resolution	5MP, 4MP, 3MP (*Half Resolution) / 2MP, 960H
AUDIO	
Input	8 RCA + 8 D-SUB
Output	1 HDMI, 1 RCA
INTERFACE	
Sensor In / Out	16 / 1 - NC / NO
USB	2 x USB 2.0
PTZ / Keyboard	RS485 - Terminal Block
ATM / POS	Ethernet POS

NETWORK	
Interface	Ethernet 10/100/1G
Compression	H.264, H.265
Speed	10fps(5MP), 15fps(2MP)
Resolution	Normal 2MP, REC Bypass Max. 5MP (Half)
STORAGE	
Primary	2 HDD
SYSTEM	
OS	Embedded Linux (Built-in Flash Memory)
Pre / Post-Alarm	5sec / 5sec~5min
Recording Mode	Continuous, Event, Schedule
Data Search	Calendar, Multi Day / Time, Event, Go to Time
Backup Interface	USB, Network
Backup Type	Video (RMS, AVI), Capture (JPEG), Lot List, Setup Data
Alarm Action	Buzzer, PTZ Preset, E-mail, Relay, Event Popup, Push
User	15 Users (Admin, User1 ~ User14)
Network Viewer	CMS, Web Viewer, App (iOS, Android), etc CCTV Smart Viewer (iOS, Android)
ONVIF	ONVIF Profile T
GENERAL	
Dimensions	430 x 270 x 86 mm (WxDxH)
Weight(w/o HDD)	4kg (8.8 lbs)
Temp / Humidity	5 ~ 40°C / 10% ~80%
Power Supply	12V / 5A
Power Consumption	60 Watts

* Half Resolution : 3MP (1024x1530), 4MP (1280x1440), 5MP (1280x1944)

Design and specifications are subject to change without notice.