


IPC-MDF

Features

- 5.69 Mega pixel 1/2.8" SONY STARVIS CMOS image sensor
- 2.8 mm Fixed Lens
- Long-range, less heat (4 x Hi-power Chip leds)
- Privacy Masking up to 8 areas
- Easy Quick Installation
- Conformant with ONVIF (Profile-S/T/G)
- IP66 Ratings
- No IR reflection and heat-proof compare to conventional dome



Dimension

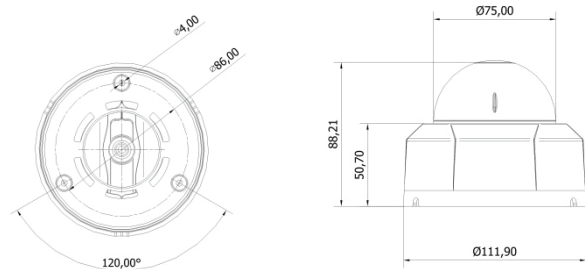

Specifications

| | |
|-------------------|--|
| Image Sensor | Sony STARVIS 5.69Mega Pixels Image Sensor |
| Size | 1/2.8 inch |
| Scan System | Progressive Scan |
| Total Pixels | 2704(H) x 2104(V), 5.69 Mega Pixels |
| Effective Pixels | 2616(H) x 1964(V), 5.14 Mega pixels |
| Day & Night | Auto / Day (Color) / Night (BW), ICR Control |
| Privacy Area | On / Off (8 Programmable Zones) |
| Motion Detection | 432 Zone, Sensitivity 1~5 Step, On / Off |
| WDR | Real WDR On / Off (Adjust) |
| DNR | 2DNR, 3DNR, On / Off (Adjust) |
| SLDC | Simple Lens Distortion Correction, On / Off |
| Defog | Detects Foggy, On / Off (Adjust) |
| Elec. Shutter | Auto(1/20~1/30000), Suppress Rolling, Manual |
| Color Adjust | Bright / Contrast / Satuation / Sharp / Hue |
| White Balance | Auto / User |
| OSD Display | Text, Date, Time, Event, On / Off |
| Image Mirror | Normal / Mirror (H) / Flip(V) / Both (HV) |
| Power Supply | DC12V |
| Current | Max 350(mA) |
| Operating Temp | 0°C ~ +50°C |
| Preservation Temp | -10°C ~ +60°C |
| Humidity | 0% ~ 95% |
| Dimension | 88.21mm (H) x 110mm (Ø) |
| Weight | 350g |

Network

| | | |
|---------|-----------------|--|
| Network | OS | Embedded Linux |
| | Interface | RJ45 10/100 Base-T PoE |
| | Protocol | TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP HTTP, DHCP, FTP, SMTP, DNS, DDNS |
| | Onvif | Ver 19.12 |
| Video | Compress Format | H.265 / H.264 / MJPEG |
| | Resolution | 2560x1920 / 2560x1440 / 2048x1536 / 1920x1080 / 1280x720 / 640x480 / 640x360 / 320x240 |
| | Max. Frame Rate | 30fps @ all resolution |
| | Video Quality | H.265 : Bitrate Control H.264 : Bitrate Control MJPEG : Quality Level Control |
| | Streaming | Triple Stream (Stream 1,2,3) RTP / RTSP, Unicast RTP, Multicast RTP |
| Audio | Compress Format | G.711u-law |
| | Streaming | Two way |

Design and specifications are subject to change without notice.